



Mini in-line pump (solenoid), ultra compact and easy to install, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05SCC600

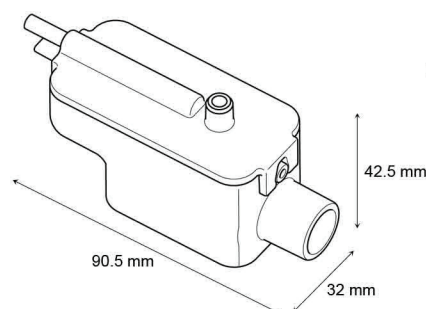

Hose diameters  
Suction - 6/9 mm - Not supplied  
Discharge - 6/9 mm - Not supplied

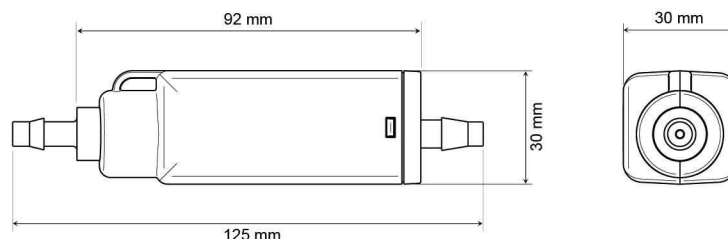

**13.2 l/h**


## Specifications

Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm**	No alarm
Noise level	N/C
Protection rating	IP64
Thermal protection	Yes
Operating cycle*	100%
Power cable lenght	1.5 m
Dimensions	125 x 30 x 30 mm / 90 x 32 x 42 mm

\* The pump is able to run 100% of the time if necessary.

\*\* Alarm option available on request.

## Flowrate

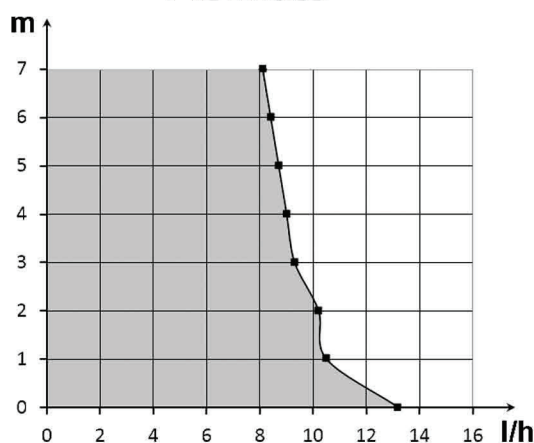

## Benefits

### ULTRA COMPACT pump

The most compact pump of the market!  
Easy installation in a duct or inside the air conditioner.



### IP64 protection rating

Protected from water and dust ingress.



### Quick connectors Plug & Play

Makes installation and maintenance easier.



### Removable clear reservoir

Allows a quick and easy viewing of the reservoir and the float. Easy to open and to clean.

### Hanging bracket



This astucious hook allows to fix or hang the pump wherever you want (duct, false ceiling, inside de unit...).

### Accessories included

All necessary accessories are included in the box.



## Pack contents

Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps

