

FLOWATCH® TANK 1.3 L



For heavy duty
and
contaminated condensates

D : L 280 x W 130 x H 135 mm

FLOWATCH®TANK is a 1.3 litres tank pump created for removing condensates from air conditioners, refrigeration units, boilers and de-humidifiers.

APPLICATIONS

- ✓ Cassette or multi cassette systems, air conditioning units
- ✓ Refrigeration display and cold store
- ✓ Gas condensing boilers.

TECHNICAL CHARACTERISTICS

Maximum flow rate	700 l/h
Max discharge head	5.5 metres
Tank capacity	1.3 l
Electric power	80 W
Mains supply	230 V 50/60 Hz
Alarm integrated	NC/NO
Thermal protection	120° C
Condensates acidity	pH> 2.5
Max of liquid temperature	60 °C
Noise level (in pressure at 1 m)	47 dBA

ADVANTAGES

Low profile

Flow rate
700 l/h

Discharge
head:
5.5 metres


Reversible
tank

4 inlet
positions

Quarter
turn, check
valve


FLOWWATCH® TANK 1.3 L

FLOW RATE

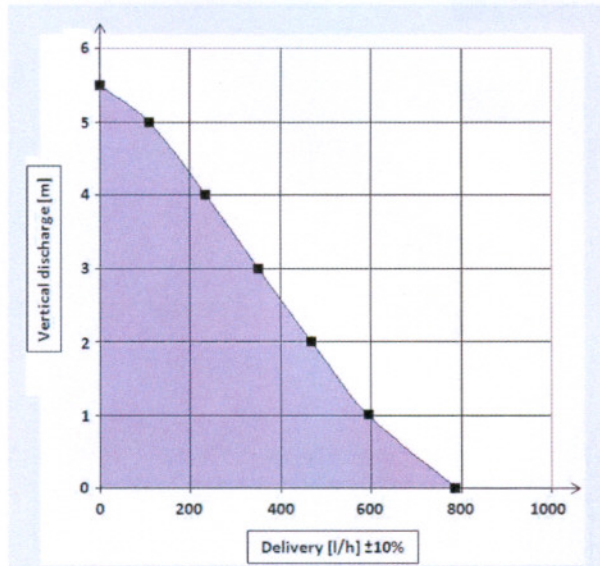


This reducer allows to link pipes of different diameters Ø 25,32,40 mm (optional accessory)


APPLICATIONS : for the removal

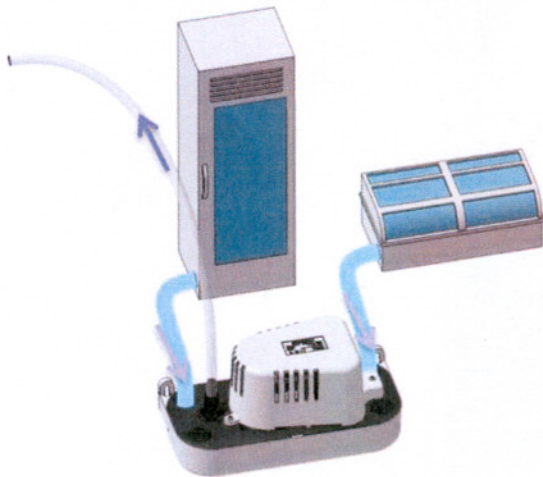

Refrigerated display cabinets

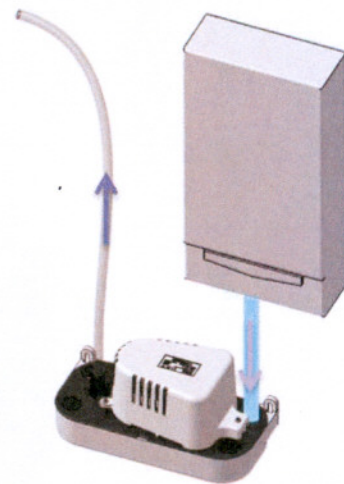

Gas condensing boilers

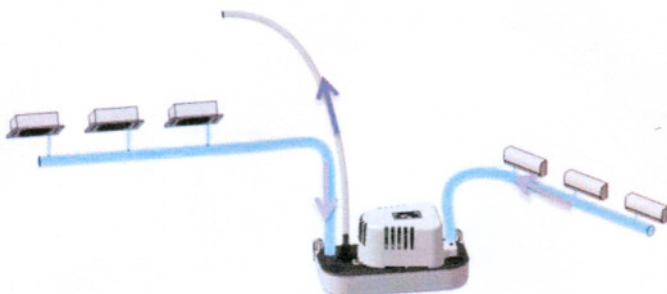

Air conditioners, cassette or multi cassette systems